

Main Configuration Output Options*

* Paper capacity may vary with different paper type/size.

/ Fold & Book Finisher-A2*

- 2-tray, 3,250-sheet (80gsm) capacity
- Corner and double stapling up to 65 sheets (80gsm)
- Booklet-making up to 20 sheets and V-fold up to 5 sheets (A3/A4R)
- Supports ECO-Staple 8 sheets (80gsm) and Staple-on-Demand 65 sheets (80gsm)
- Supports optional external 2/3 and 2/F4 Hole Puncher Unit-A1

* Requires buffer pass unit

/ Staple Finisher-AB3*

- 2-tray, 3,250-sheet (80gsm) capacity
- Corner and double stapling up to 65 sheets (80gsm)
- Supports ECO-Staple 8 sheets (80gsm) and Staple-on-Demand 65 sheets (80gsm)
- Supports optional external 2/3 and 2/F4 Hole Puncher Unit-A1

* Requires buffer pass unit

/ Paper Folding Unit-L1*

- Supports Z-fold
- Media weight 52-105gsm

* Requires buffer pass unit and external finisher unit

/ Cassette Feeding Unit-AY1



- Supports up to A3
- Media weight 52-300gsm
- 2 x 550 sheets (80gsm)

/ High Capacity Cassette Feeding Unit-F1

- Supports A4
- Media weight 52-300gsm
- 2,450 sheets (80gsm)

/ Canon Paper Deck Unit-F2/F3

- Supports A4
- Media weight 52-256gsm
- 2,700 sheets (80gsm)

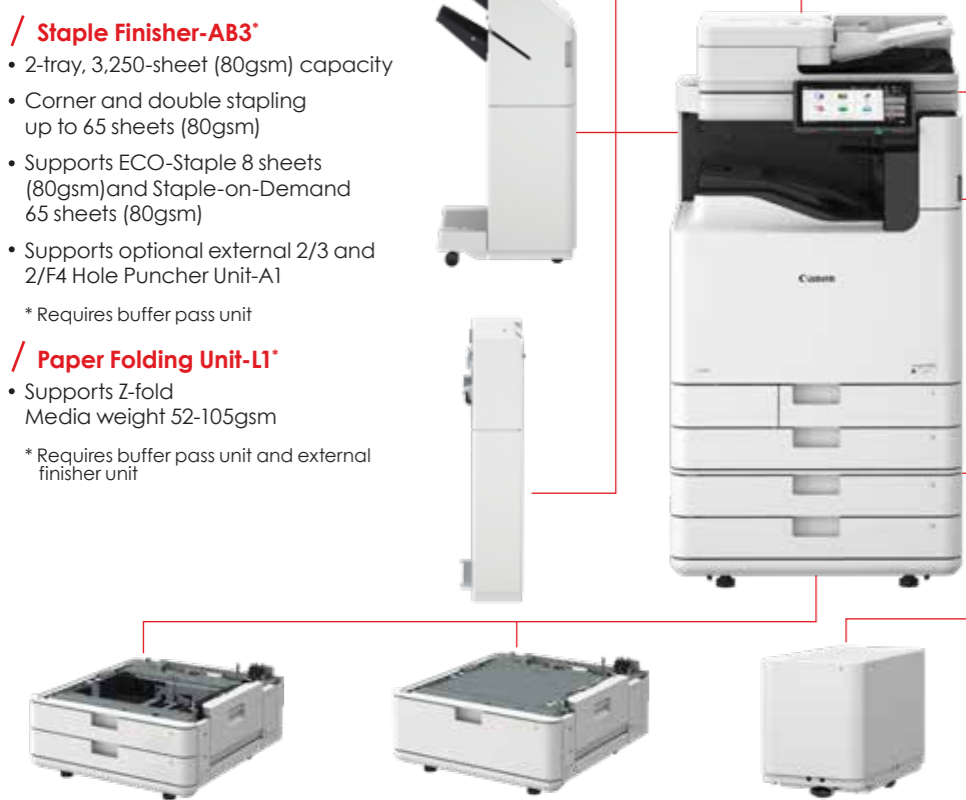

Partner / Dealer Stamp

CANON INDIA PVT. LTD. 7th Floor, Tower B, Building #5, DLF Epitome Building, DLF Phase III, Gurugram-122002
Ph.: 0124-4160000 | Fax: 0124-4160011 | Web: in.canon

This document is for general information only and contents are subject to change without notice. Errors and omissions excepted. Weights and dimensions are approximates. Options, name and availability may vary by regions. Nothing in this document should be construed as a warranty. We expressly disclaim any liability or contractual obligations in connection with this document. Trademarks belong to their respective owners.

Canon, imageFORCE, MEAP, eMaintenance, iW, Business can be simple and Canon Genuine Toner, Cartridge & parts are trademarks of Canon Inc. and/or its affiliates. "MEAP" is a trademark of CANON Inc., referring to an "application platform" for Canon multifunction and single function printers. Other names may be the trademarks of their respective owners. uniFLOW, eCopy and therefore are independent party software distributed by Canon Singapore Pte Ltd.

Adobe, PostScript, and the PostScript logo are either registered trademarks or trademarks of Adobe in the United States and/or other countries.

2025 Canon India Pvt. Ltd.
All rights reserved. Printed in India

imageFORCE C5100 series

Canon

Delighting You Always

EXCEPTIONAL QUALITY TO POWER EVERY BUSINESS MOVE



Canon imageFORCE C5100 series is a versatile multifunction device, designed to take office creativity to the next level.

Breakthrough innovations such as (D² Exposure Technology) OLED and 4,800 x 2,400 dpi resolution help deliver outstanding print output, with high-quality print and improved smoothness.

Powerful and reliable, it utilises AI-assisted smart maintenance to support workflow continuity — alongside E² Analysis technology that monitors component health to maintain peak performance.

With the capability to handle media weights up to 300gsm from lower cassettes, it offers businesses the flexibility to utilise a wide range of paper types.



CONNECTIVITY

Access cloud platforms like Google Drive and Dropbox directly from the device. Enjoy mobile printing with Canon PRINT, Apple AirPrint and more for ultimate convenience.



SECURITY

Advanced protection for your data, with features like secure print, activity logs and SIEM compatibility to monitor and mitigate risks.



RELIABILITY

Engineered for uninterrupted performance, with intelligent maintenance tools and long-lasting parts that reduce downtime.



SUSTAINABILITY

Built with up to 30% recycled plastic, supported by eco-friendly packaging and low-energy consumption for reduced environmental impact.

Business Can Be Simple

imageFORCE C5100 series Specifications

Main Unit

Machine type

A3 Colour Multifunctional

Core functions

Print, Copy, Scan, Send, Store and Optional Fax

Processor

Dual Core Processor

Control Panel

10.1" TFT LCD WSVGA Colour Touch panel

Memory

RAM: 6.0GB

Storage

Standard: (SSD) 256GB
Optional: (SSD) 1TB

Interface connection

NETWORK

Standard: 1000Base-T/100Base-TX/10Base-T
Optional: Wireless LAN
(IEEE 802.11a/b/g/n/ac/ax)

OTHERS

Standard: USB 2.0 (Host) x1, USB 3.0 (Host) x1,
USB 2.0 (Device) x1
Optional: Serial Interface,
Copy Control Interface

Paper supply capacity (A4, 80gsm)

Standard: 1,200 sheets
100-sheet Multi-purpose tray x1
550-sheet Paper cassette x2
Maximum: 6,350 sheets
(with High Capacity Cassette
Feeding Unit-F1 + Paper Deck
Unit-F2/F3)

Paper output capacity (A4, 80gsm)

Standard: 250 sheets
Maximum:
3,450 Sheets (with Staple Finisher-AB3 or Paper
Folding/Booklet Finisher-A2 and 3rd Copy Tray
Kit-A1)

Supported media types

Multi-purpose tray:
Thin, Plain, Recycled, Eco, Colour, Heavy,
Coated, Tracing, Bond, Transparency, Label,
Pre-punched, Letterhead, Tab, Envelope

Paper Cassette (Upper/Lower):

Thin, Plain, Recycled, Eco, Colour, Heavy, Bond,
Transparency, Pre-punched, Letterhead, Envelope*
* Envelope Feeder Attachment is required.

Supported media sizes

Multi-purpose tray:
Standard size:
SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R
Custom size:
98.0 x 139.7 mm to 320.0 x 457.2 mm
Free size:
98.0 x 139.7 mm to 320.0 x 457.2 mm
Envelopes:
COM 10 No.10, Monarch, DL, ISO-C5
Envelope custom size:
98.0 x 98.0 mm to 320.0 x 457.2 mm

Upper Cassette:

Standard size: A4, A5, A5R, A6R, B5
Custom size: 98.0 x 148.0 mm to 297.0 x 215.9 mm
Envelopes: COM10 No.10, Monarch, DL, ISO-C5

Lower Cassette:

Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R
Custom size: 98.0 x 148.0 mm to 304.8 x 457.2 mm
Envelopes: COM10 No.10, Monarch, DL, ISO-C5

Supported media weights

Multi-purpose tray: 52 to 300gsm
Paper Cassette (Upper): 52 to 256gsm
Paper Cassette (Lower): 52 to 300gsm
Duplex: 52 to 256gsm

Warm-up time

Quick Startup Mode: 4 seconds or less*
* Time from device power-on to when the
copy icon appears and is enabled to operate
on the touch panel display.

From Power On: 6 seconds or less*

* Time from device power-on, until copy ready
(not print reservation).

From Sleep Mode:

7 Seconds or less (imageFORCE C5170)
6 Seconds or less (imageFORCE C5160/
C5150/C5140)

Dimensions (W x D x H)

620 x 722 x 937 mm

Installation space (W x D)

Basic: 1,050 x 1,162 mm (Right Cover Open
with Multi-purpose tray extended + Cassette
Drawers Open)
Fully Configured: 2,044 x 1,162 mm (Staple
Finisher-AB3/Paper Folding/Booklet Finisher-A2
with the extension tray extended + Paper
Folding Unit-L1 + Paper Deck Unit-F2/F3 +
Cassette Drawers open)

Weight*

Approx. 108 kg
* Including regular toner

Scan Specifications

Type

Single-pass Duplexing Automatic Document
Feeder* [2-sided to 2-sided (Automatic)]
* Multi-Sheet Feed Detection is supported.

Document feeder paper capacity (80gsm)

Up to 200 Sheets

Document feeder acceptable paper weight

Document Feeder media weight: 38 to 220gsm*
* A6R or smaller: 50 to 220gsm

Supported media sizes

Platen scanning size: up to 297.0 x 431.8 mm
Document Feeder media size:
A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, B6R
Custom size:
69.9 x 139.7 mm to 304.8 x 431.8 mm

Scan speed (ipm, BW/CL, A4)

1-sided Scanning:
135/135 (300 x 300 dpi, send),
80/80 (600 x 600 dpi, copy)
2-sided Scanning:
270/270 (300 x 300 dpi, send),
160/90 (600 x 600 dpi, copy)

Scan resolution (dpi)

600x600

Pull scan specifications

Colour Network ScanGear2 for both TWAIN
and WIA
Supported OS: Windows® 10/11/Server 2016/
Server 2019/Server 2022/Server 2025

Send Specifications

Destination

Standard: E-mail/Internet FAX (SMTP*), SMB, FTP,
WebDAV, Mail Box
Optional: Super G3 FAX, IP Fax
* Available OAuth 2.0 authentication method
on Microsoft 365 and Google Workspace

Address book

LDAP (2,000)/Local (1,600)/Speed dial (200)

Communication protocol

File: FTP(TCP/IP), SMB3.1.1 (TCP/IP), WebDAV
E-mail/I-Fax: SMTP, POP3

File format

TIFF(MMR), JPEG*, PDF(Compact, Searchable,
Optimize for Web, PDF/A-1b, Trace & Smooth,
Encrypted, Device Signature, User Signature),
XPS(Compact, Searchable, Device Signature,
User Signature), Office Open XML (PowerPoint,
Word)
* Only Single page

Fax Specifications

Maximum number of connection lines

4

Modem speed

Super G3: 33.6 kbps
G3: 14.4 kbps

Compression method

MH, MR, MMR, JBIG

Resolution (dpi)

400 x 400 (Ultra Fine), 200 x 400 (Super Fine),
200 x 200 (Fine), 200 x 100 (Normal)

Sending/Receiving size

Sending:
A3, A4, A4R, A5*, A5R*, A6R*, B4, B5*, B5R*
Receiving:
A3, A4, A4R, A5, A5R, B4, B5, B5R
*1 Sent as A4
*2 Sent as B4 short

FAX memory

Up to 30,000 pages (2,000 jobs)

Speed dials

Max. 200

Group dials/destinations

Max. 199 dials

Sequential broadcast

Max. 256 addresses

Memory backup

Yes

Print Specifications

Print speed (BW and CL)

imageFORCE C5170
up to 70 ppm (A4, A5*, A5R, A6R*),
up to 36 ppm (A3), up to 42 ppm (A4R)
imageFORCE C5160
up to 60 ppm (A4, A5*, A5R, A6R*),
up to 32 ppm (A3), up to 36 ppm (A4R)
imageFORCE C5150
up to 50 ppm (A4, A5*, A5R, A6R*),
up to 27 ppm (A3), up to 30 ppm (A4R)
imageFORCE C5140
up to 40 ppm (A4, A5*, A5R, A6R*),
up to 20 ppm (A3), up to 24 ppm (A4R)
* 1-sided only

Print resolution (dpi)

4,800 x 2,400

Page description languages

Standard: UFR II, PCL6/PCL5
Optional: Adobe PostScript 3

Printing from mobile and cloud

AirPrint, Mopria®, IPP Everywhere, Canon
PRINT, uniFLOW Online, Universal Print and
Cloud Connector

OS standard printing

Android/Windows® 10/Windows® 11/Chrome
OS/macOS (11.2.2 or later) /iOS (15.2 or
later)/iPadOS

Fonts

PS fonts: 136 Roman
PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR
fonts, Andalé Mono WT J/K/S/T*1 (Japanese,
Korean, Simplified and Traditional Chinese),
Barcode fonts*2
*1 Optional PCL International Font Set-A1 is
required.
*2 Optional Barcode Printing Kit-D1 is required.

Direct print

Supported file types: PDF, EPS, TIFF/JPEG, and XPS

Operating system

UFR II: Windows® 10/11/Server2016/Server2019/
Server2022/Server 2025, macOS (10.14 or later)
PCL: Windows® 10/11/Server2016/Server2019/
Server2022/Server 2025
PS: Windows® 10/11/Server2016/Server2019/
Server2022/Server 2025, macOS (10.14 or later)
PPD: Windows® 10/11/Server2016/Server2019/
Server2022/Server 2025, macOS (10.14 or later)

Copy Specifications

Copy speed (BW and CL)

imageFORCE C5170
up to 70 ppm (A4, A5*, A5R, A6R*),
up to 36 ppm (A3), up to 42 ppm (A4R)
imageFORCE C5160
up to 60 ppm (A4, A5*, A5R, A6R*),
up to 32 ppm (A3), up to 36 ppm (A4R)
imageFORCE C5150
up to 50 ppm (A4, A5*, A5R, A6R*),
up to 27 ppm (A3), up to 30 ppm (A4R)
imageFORCE C5140
up to 40 ppm (A4, A5*, A5R, A6R*),
up to 20 ppm (A3), up to 24 ppm (A4R)
* 1-sided only

First-copy-out time (A4, BW/CL)

imageFORCE C5170:
Approx. 2.7 / 3.7 seconds or less
imageFORCE C5160:
Approx. 2.9 / 4.2 seconds or less
imageFORCE C5150:
Approx. 3.4 / 4.9 seconds or less
imageFORCE C5140:
Approx. 4.1 / 6.1 seconds or less

Copy resolution (dpi)

600 x 600

Multiple copies

Up to 999 copies

Copy density

Automatic or Manual (9 Levels)

Magnification

Variable zoom: 25% to 400% (1% Increments)